


Data Sheet		F075 Genuine Chemours ® Viton ® F - 70% Flourine	
Data Sheet Type	Final		
Material Reference	F075		REACH
Polymer	FKM(>68% Flourine)	Animal Derived typic dent	
Date Issued	20/05/24		

Description

Chemours ® Viton ® F - 70% Flourine - Better Chemical Resistance

The Viton &Reg; F Family wsa designed for use with Oxygenated Fules, modern lubricants and blended aggeressive chemical agents. As New Chemicals are developed Chemours is leading New Developments in Viton F to match the sealing challenges they create.

Purposes

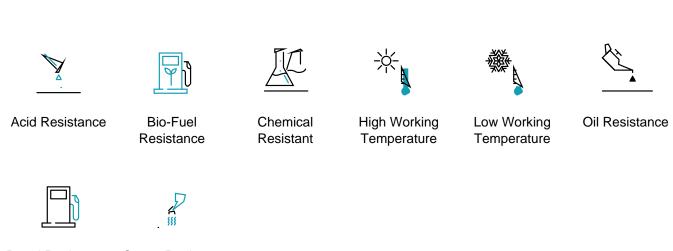

Petrol Resistance Steam Resistant

Important Notes about this Material Data Sheet

This datasheet has been carefully compiled to advise you, our customer, in the best possible way. The information, figures, test values, and data correspond to actual engineering standards and are the result of many years of tests and trials. As individual operating conditions influence the application of each product, the information supplied in this datasheet can only be seen as a rough guideline. In every case it is the sole responsibility of the customer to evaluate his individual requirements, in particular whether the specified properties of our products are sufficient for the intended use. This datasheet is subject to alteration without prior notice. All mentioned values contained herein are guiding values representing long-term experience averages. Please be aware that Test Results for individual Material Batches will only be provided if requested at the time of order and may be subject to additional charges and/or lead times. This Data Sheet supersedes all previous data sheets and any other data previously provided either Verbally, Electronic or Written, with reference to the above Material Grade.